



ENGINE OPTION MODEL
Motorausführung

1B40^T_U -1

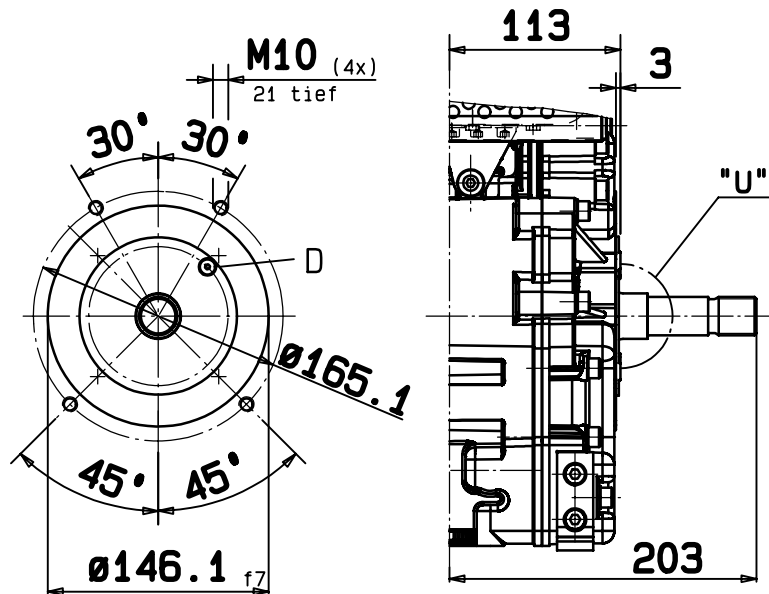

SAE J609a
Flansch B


DETAIL "U"

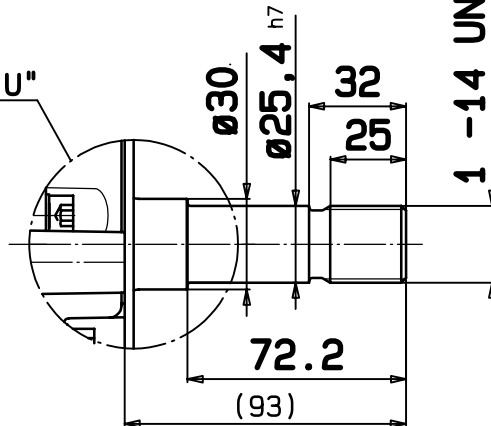

1 -14 UNS 2A


ENGINE OPTION MODEL
Motorausführung

1B40^T_U -2

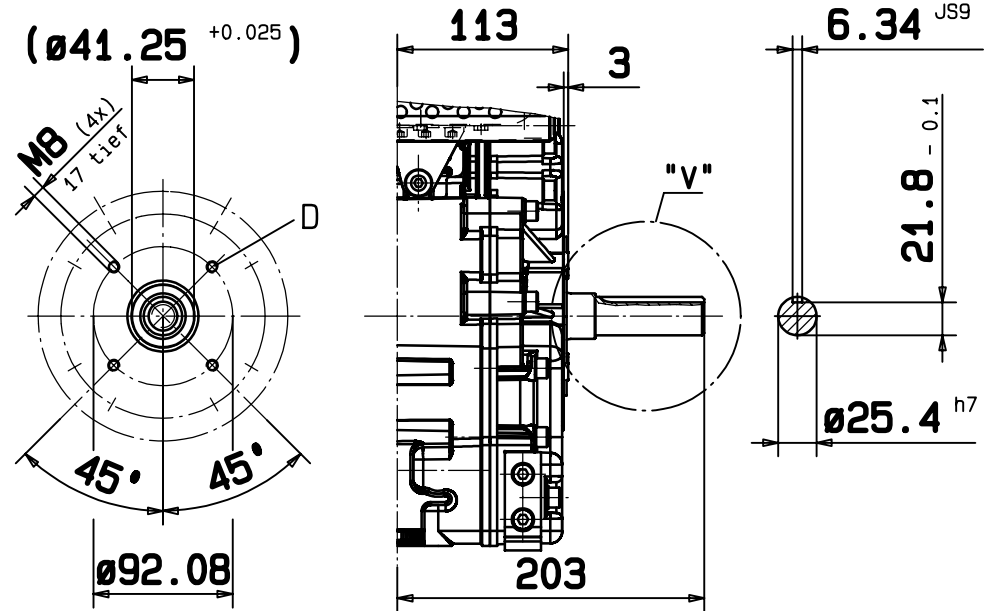


SAE J609a
Flansch A

DETAIL "V"

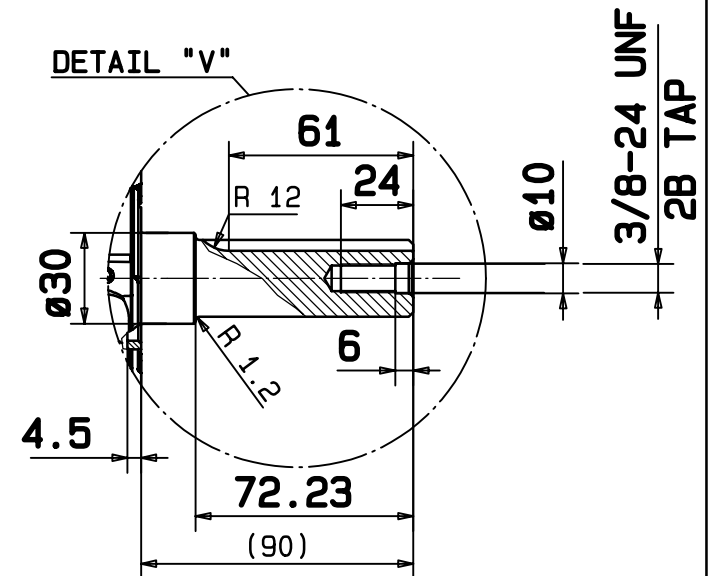

3/8-24 UNF
2B TAP



D : SCREWS WITH SEALANT
(FOR EXAMPLE LOCTITE 221)

D : Schrauben mit Dichtmittel
(z.B. Loctite 221)

In the interests of technical progress we reserve the right to introduce modifications.
Änderungen, die dem technischen Fortschritt dienen, behalten wir uns vor.

The range of the length over-all based on tolerances can add up to ± 3 mm
Toleranzbedingte Streubreite bei Kastenmassen ± 3 mm

PROTECTION MARK
ACC. TO DIN 34

Schutzvermerk nach
DIN 34 beachten



INSTALLATION DRAWING
Einbauzeichnung
1B40 SHAFTS AT GOVERNOR-SIDE
Wellen auf sts.

SHEET OF SHEETS
Blatt 8 von 11 Blättern
gez.: 19.07.12 Gernh gepr.: 19.07.12 Mad1